

Seal Break Pliers™

The Seal Break Pliers™ easily separate each process connection from gasket seals on a process vessel.



The Problem

After heavy use, a gasket seal can often become heat sealed, vacuum sealed, or otherwise bonded to the process connection, causing a frustrating and expensive stoppage to your process. In the interest of getting back to work, employees commonly resort to forcing the process connection and gasket seal apart with the nearest screwdriver.

This poses a major risk of gouging the process vessel, potentially, contaminating the sanitary connection and preventing it from sealing correctly in the future, and could endanger the safety of the employee attempting to fix the issue.



The Solution

The innovative new Seal Break Pliers™ not only protect every sanitary connection from needless carbon contamination, the plier set is designed to protect your valuable process vessel from damage. Featuring quality stainless steel and quick-grip functionality that eliminates the temptation to hassle with screwdriver and hammer, our pliers are simply more convenient to use.

Don't risk the damage.

Trust the HOLLOWAY-engineered Seal Break Pliers™ on every connection, every time.



Holloway America
720 N. Cedarbrook Ave.
Springfield, MO 65802

Phone: 417.863.0077
Toll Free: 866.659.0077
Fax: 417.863.8851

www.HollowayAmerica.com
info@HollowayAmerica.com
Datasheet: FPSB_200731

Seal Break Pliers™

Seal Break Pliers™ Features

- Provided in a durable, highly visible, waterproof case.
- Each plier has an ergonomic, one-handed design.
- The design works on vessel and process piping clamp-type connections, including blank clamp-type caps.
- When used properly, this tool will not damage existing sealing surfaces or process connections.
- The ends of the pliers have rounded edges to assist the operator in loosening or tightening clamp wingnuts.
- Arrives in a bright yellow case with hard plastic insert to keep set safe and sanitary.
- Full set Available in a 20" Wide x 5 1/2" Tall x 17" Deep case with plastic insert weighing 17.9LBS.



Seal Break Pliers™ Specifications

Sizes	1/2" - 4" Stocked , 2 1/2" and 6" Available on Request
Finish	35Ra Stocked
Materials	CNC Machined T-316L SS



Holloway America
720 N. Cedarbrook Ave.
Springfield, MO 65802



Phone: 417.863.0077
Toll Free: 866.659.0077
Fax: 417.863.8851

www.HollowayAmerica.com
info@HollowayAmerica.com
Datasheet: FPSB_200731

Seal Break Pliers™

Seal Break Pliers™ Dimensions

DESCRIPTION	PART #	"A" LENGTH	"B" WIDTH	"C" HEIGHT	WEIGHT
1/2" / 3/4" SEAL BREAK PLIER	FPSB1112	9.875"	2.000"	0.750"	1.9 LBS.
1" / 1 1/2" SEAL BREAK PLIER	FPSB1212	10.188"	2.625"	0.750"	1.9 LBS.
2" SEAL BREAK PLIER	FPSB1312	10.188"	2.625"	0.750"	1.7 LBS.
3" SEAL BREAK PLIER	FPSB1412	11.500"	3.625"	0.750"	2.0 LBS.
4" SEAL BREAK PLIER	FPSB1512	12.438"	4.688"	0.750"	2.0 LBS.
PLIERS IN CASE W/ PLASTIC INSERT	FPSBSETP				17.9 LBS.

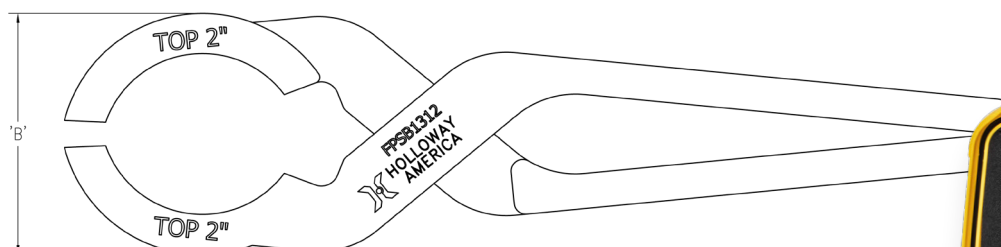

Seal Break Pliers™ Tutorial on YouTube

Seal-Break Pliers



Visit www.ProcessConnectionPliers.com for more information.



Holloway America
720 N. Cedarbrook Ave.
Springfield, MO 65802

Phone: 417.863.0077
Toll Free: 866.659.0077
Fax: 417.863.8851

www.HollowayAmerica.com
info@HollowayAmerica.com
Datasheet: FPSB_200731